

TX-1307SW08A-2860V36-10H90

PRODUCT SPECIFICATION

Features:

- ↵ Excellent transiting heat from LED chip operating under 250mA.
- ↵ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ↵ High luminous output.
- ↵ No UV.
- ↵ Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ↵ GaInN


Emitting Color:

- ↵ White
- ↵ Warm white

Applications:

- ↵ Commercial lighting
- ↵ General Lighting

Part No.	TX-1307SW08A-2860V36-10H90	Spec No.	WKF-BF0372	Page	1 of 10
----------	----------------------------	----------	------------	------	---------



Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Forward Current	IF	250	mA
Reverse Voltage	V _R	Not designed for reverse operation	V
Power Dissipation	P _D	S	9
		W	9
		S+W	9
Junction Temperature	T _j	S	135
		W	135
Case Temperature (C)	T _c	85	"
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	T _{stg}	-30~+100	"
Operation Temperature	T _{opr}	-30~+80	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
 STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	ϕ_v	If=200mA	S	—	600	—	lm
			W	—	750	—	
Forward Voltage	V_f		S	34	36	38	V
			W	34	36	38	
Correlated Colour Temperature	CCT		S	—	2800	—	K
			W	—	6000	—	
Viewing Angle at 50° IV	$2\theta_{1/2}$		S	—	115	—	Deg
			W	—	115	—	
Reverse Current	I_r		—	—	—	—	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$		S	—	4.8	—	K/W
		W	—	4.8	—		
Temperature Coefficient of Voltage	$V\Delta F/T$	S	—	-17	—	mV/ "	
		W	—	-17	—		
Color Rendering Index	Ra	S	—	90	—	—	
		W	—	90	—		

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±3%.
- 5.Ra measurement tolerance: ± 2.

Part No.	TX-1307SW08A-2860V36-10H90	Spec No.	WKF-BF0372	Page	4 of 10
----------	----------------------------	----------	------------	------	---------

TYANSHINE





TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.



TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.


TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

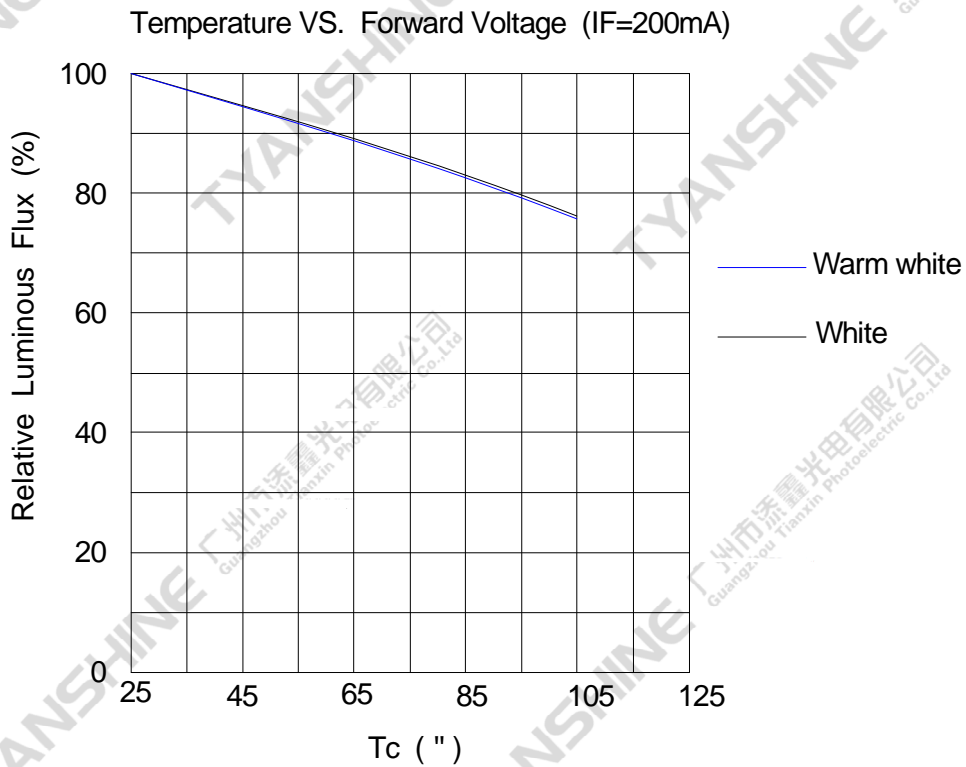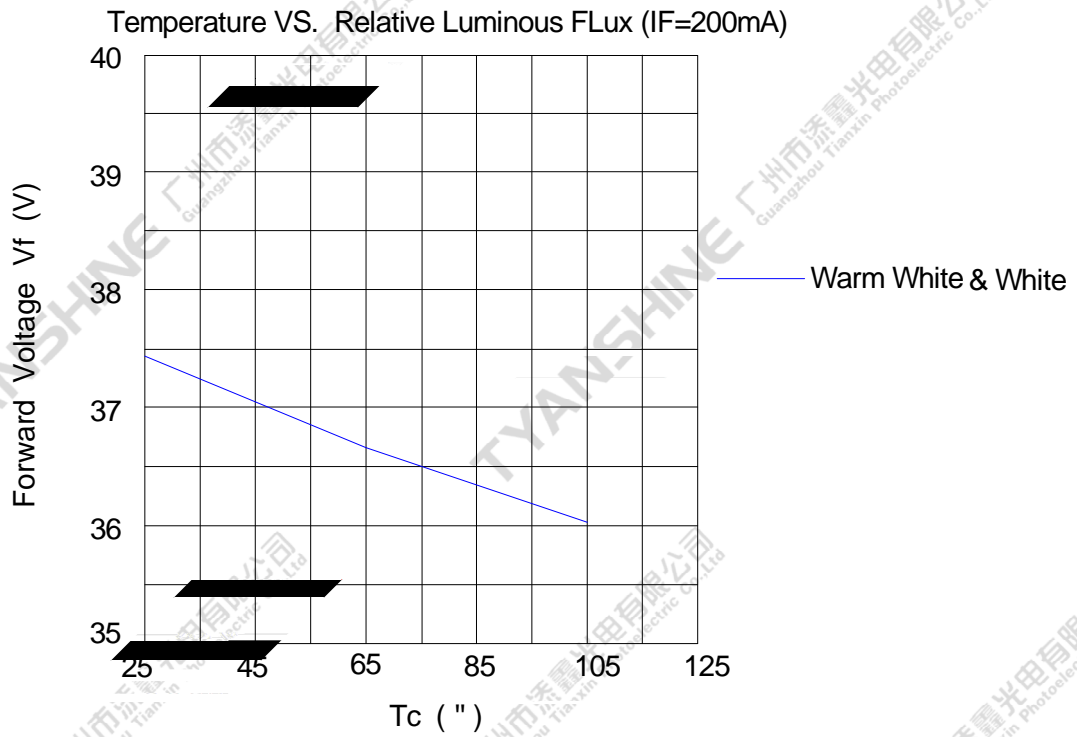

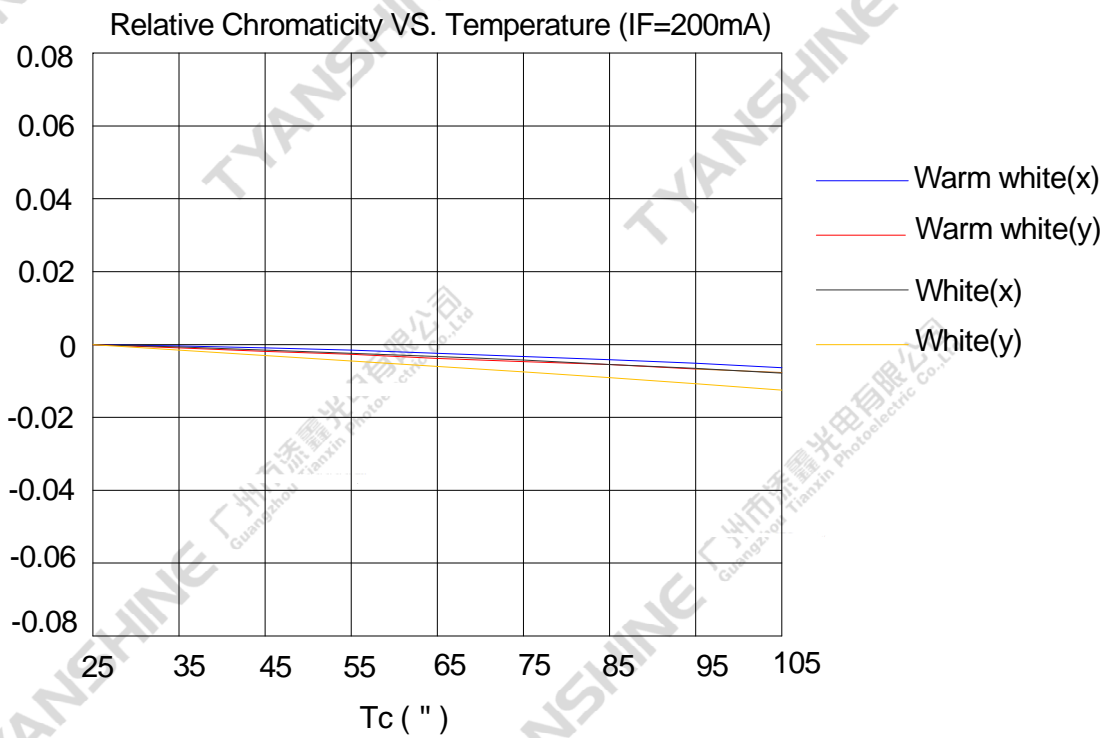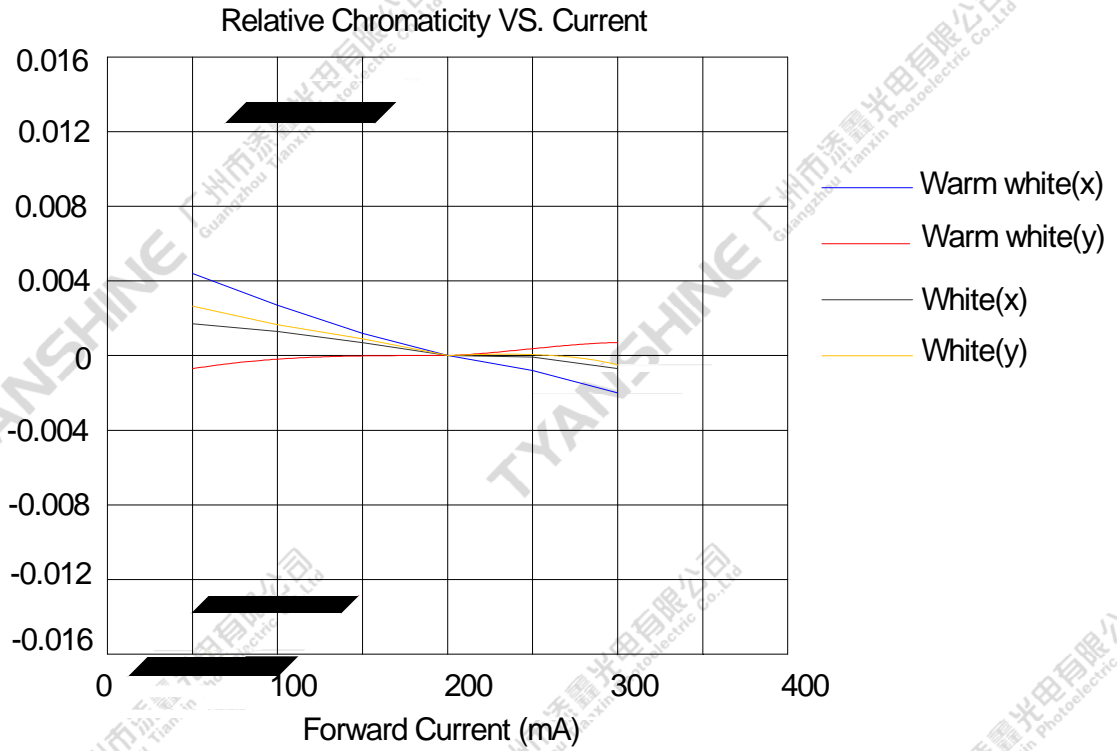


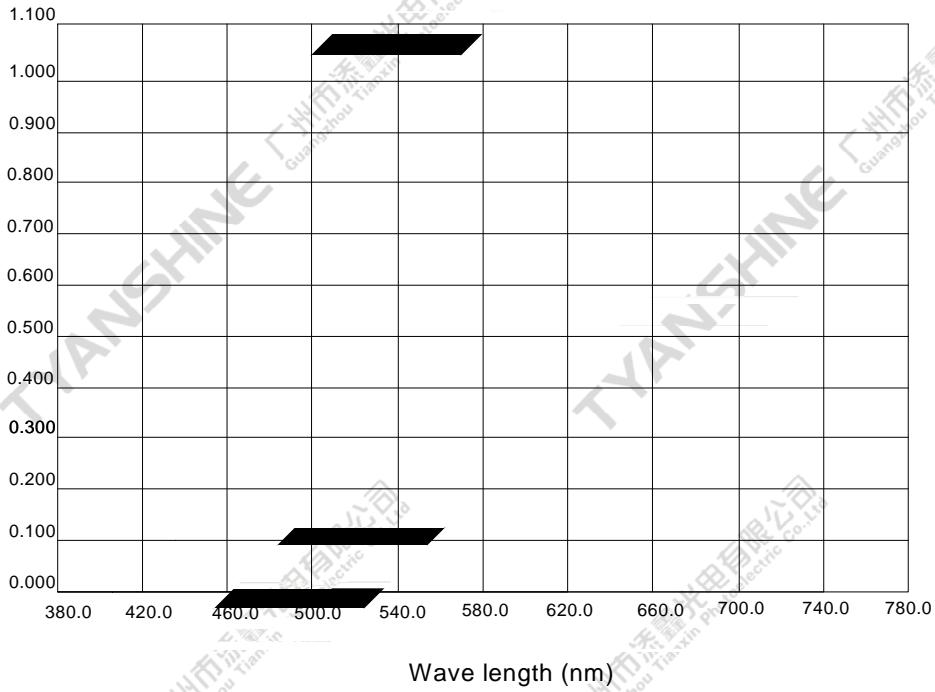

TYANSHINE 广州市添鑫光电有限公司 Guangzhou Tianxin Photoelectric Co., Ltd.

Part No.	TX-1307SW08A-2860V36-10H90	Spec No.	WKF-BF0372	Page	8 of 10
----------	----------------------------	----------	------------	------	---------

Chromaticity Coordinates 条件 IF=200mA Tc=25 " 唉

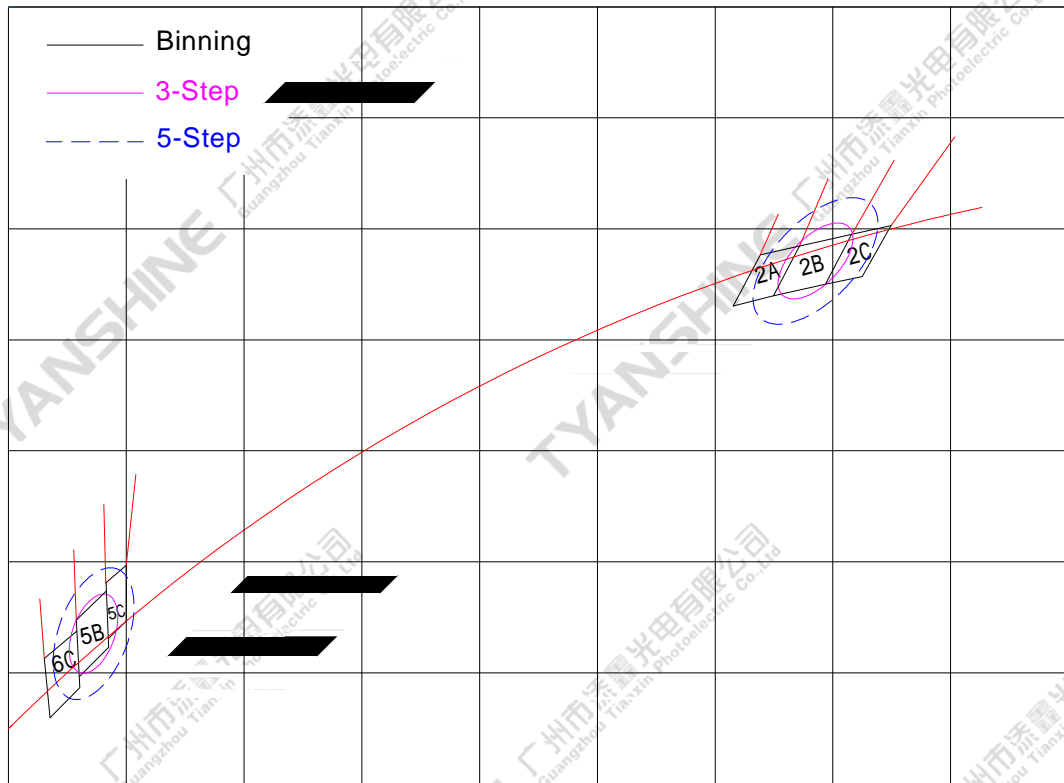

Notes:

1.chromaticity (x, y) measurements tolerance: ± 0.005 .

Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=200mA Ta=25 " x1000hrs
Low Temperature Storage Test	-30 " x 1000 hours
High Temperature Storage Test	100 " x 1000 hours
Moisture-proof Test	85 " , 85 %RH for 500 hours
Thermal Shock Test	-30 " x 30 minutes – 100 " x 30 minutes, 100 cycle

Part No.	TX-1307SW08A-2860V36-10H90	Spec No.	WKF-BF0372	Page	9 of 10
----------	----------------------------	----------	------------	------	---------

