

# TX-2016B8VSA1-NP3DE-01

## PRODUCT SPECIFICATION

Features:


Chip Material:

Emitting Color:

Applications:











--	--	--	--	--	--

# Package Dimensions:

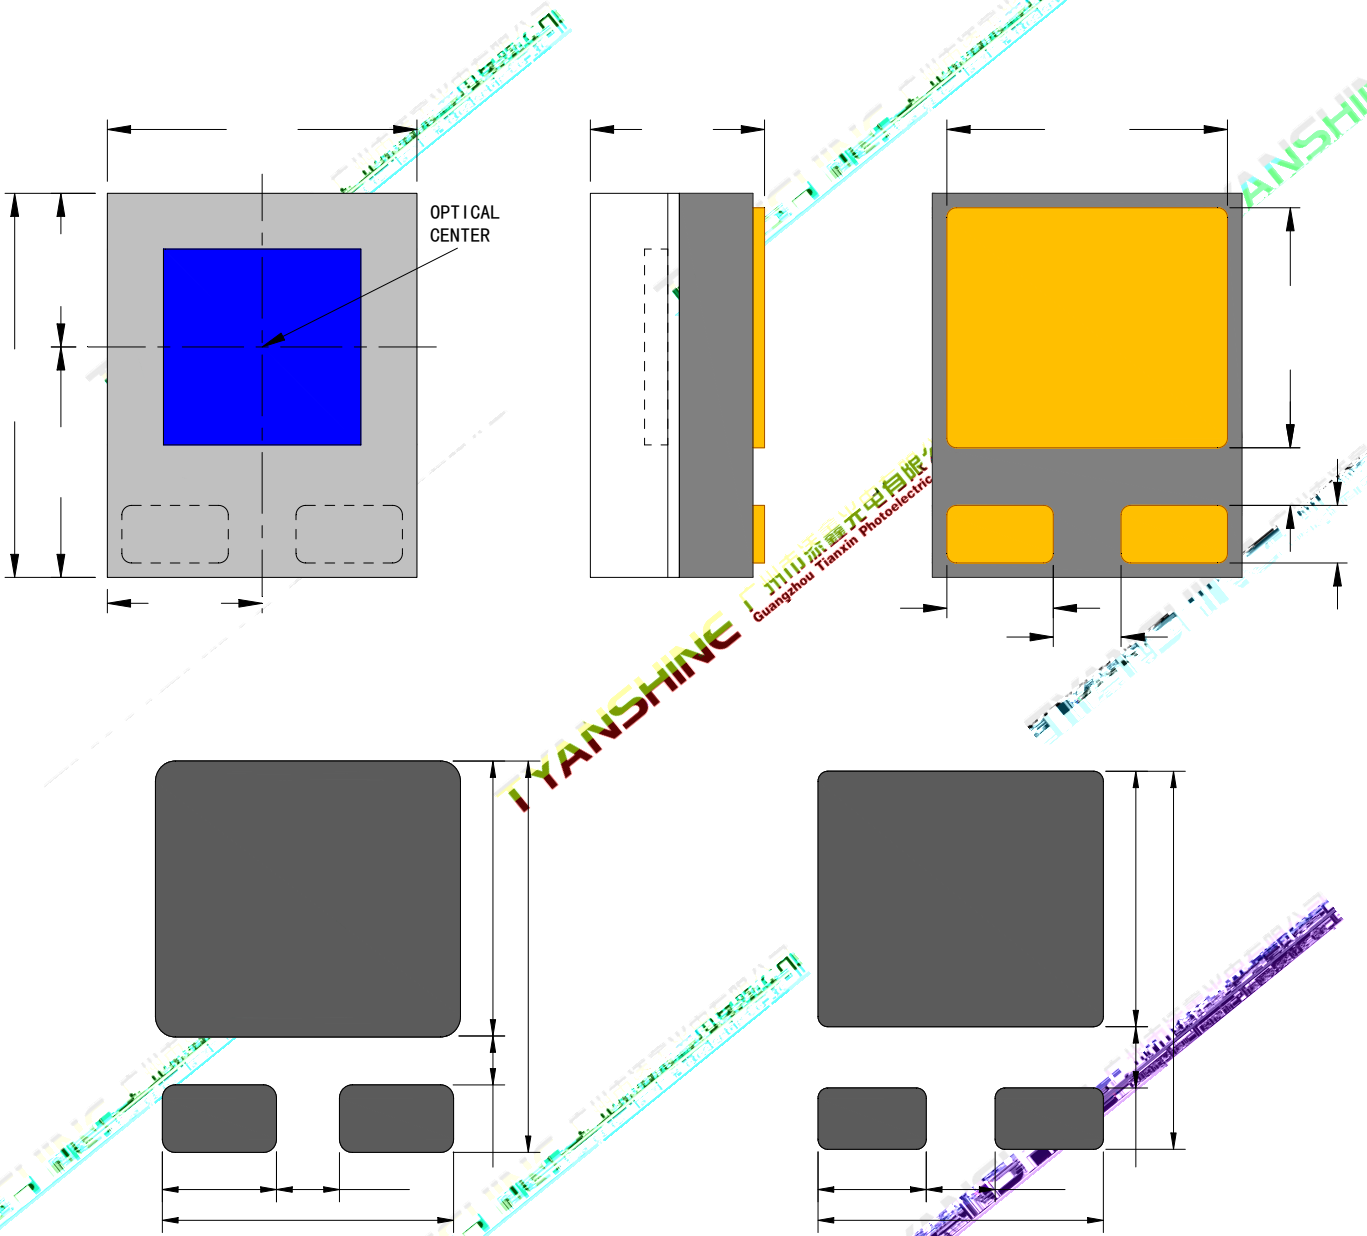

## Notes:

--	--	--	--	--	--

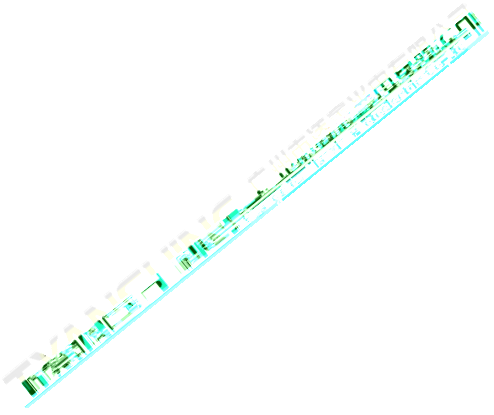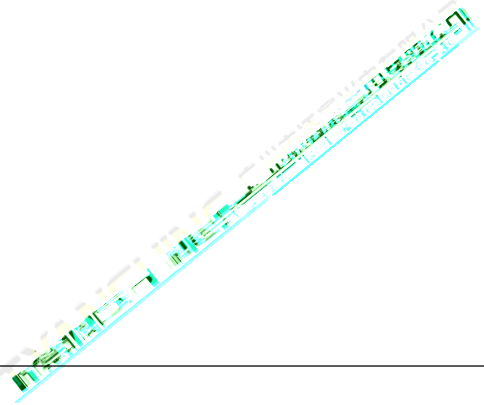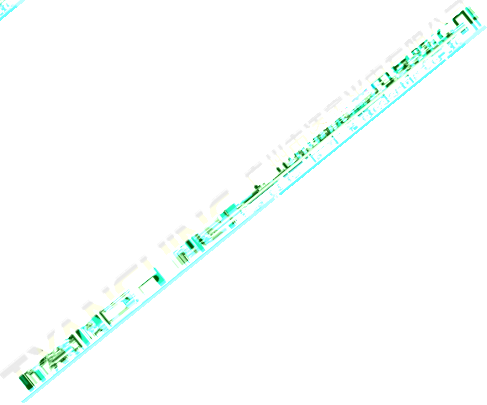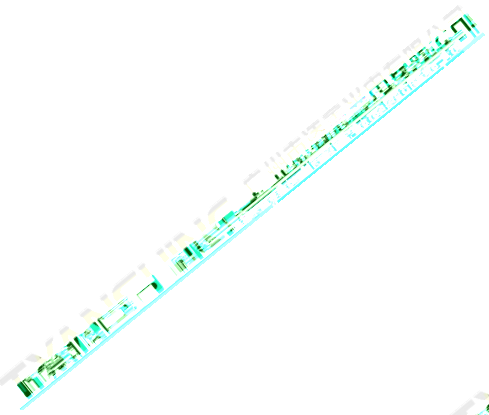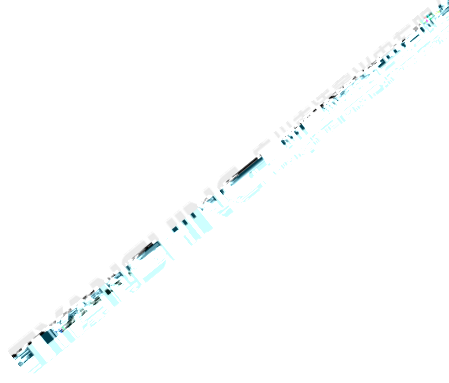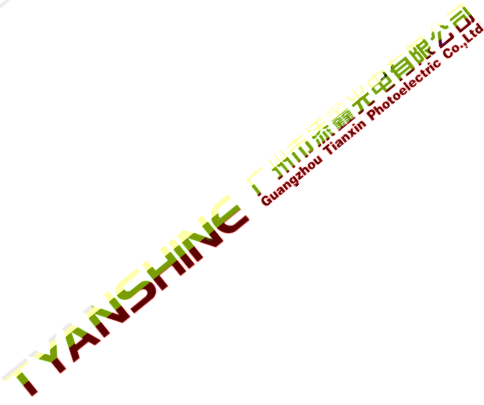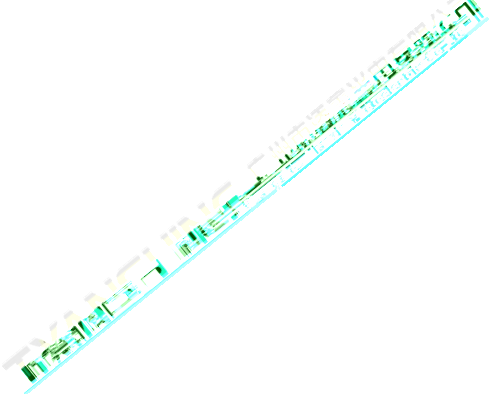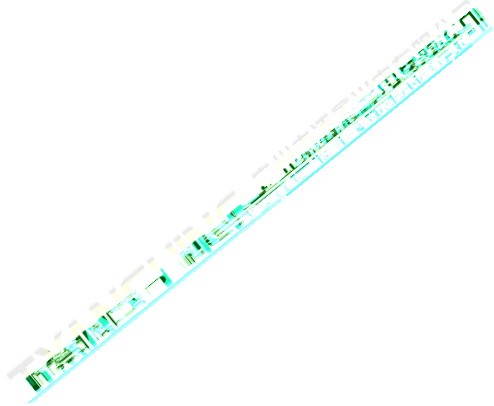


## Electrical Optical Characteristics (Tc=25°C IF=1.0A)

Parameter	Symbol	Min.	Typ.	Max.	Units

Notes:







--	--	--	--	--	--





**TYANSHINE** 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co.,Ltd

**TYANSHINE** 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co.,Ltd

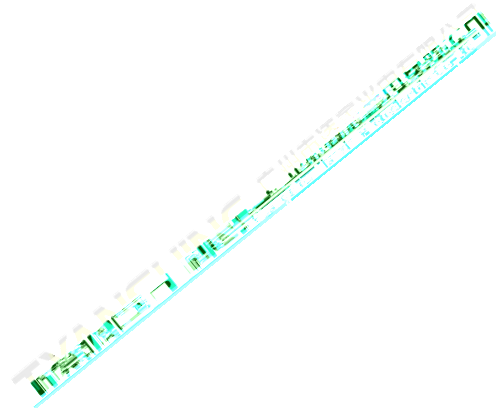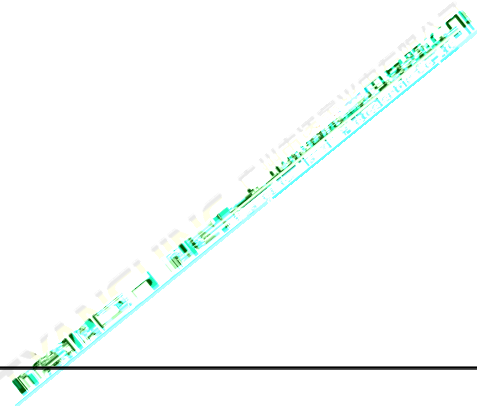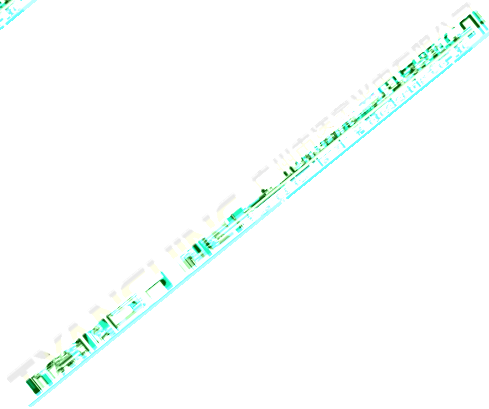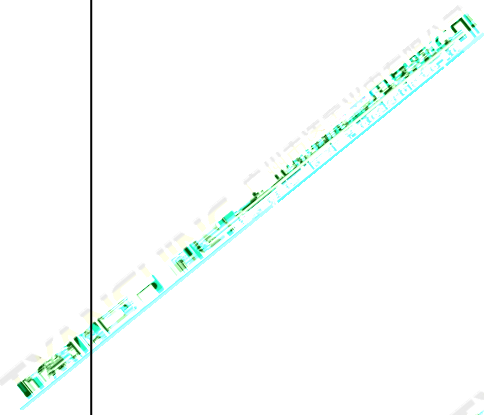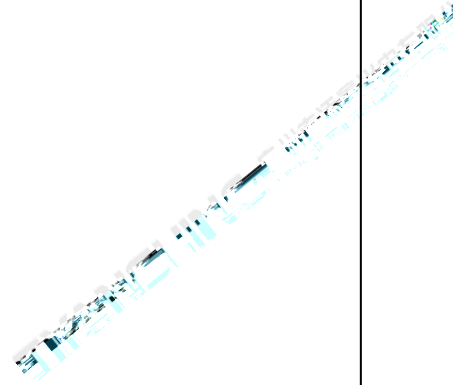


--	--	--	--	--	--	--

# Usage Precautions

## Storage Environment Condition



## Soldering Condition

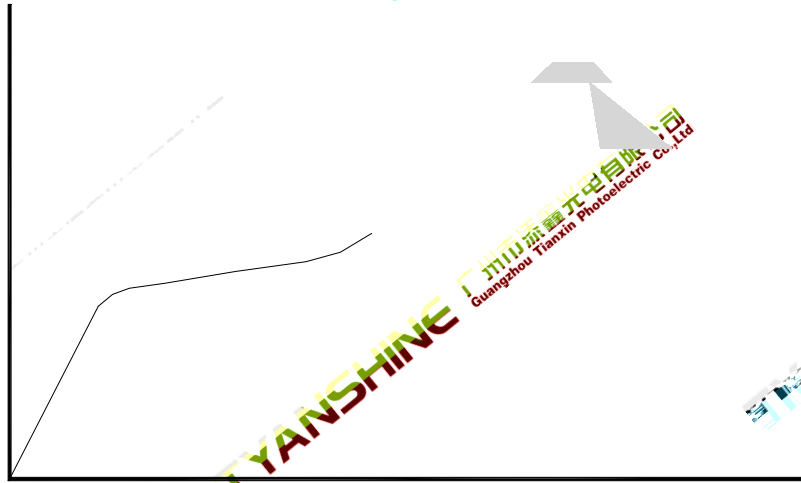

--	--	--	--	--	--	--	--

# Dimensions For Cannulation And Packaging

Quantity: 3000PCS

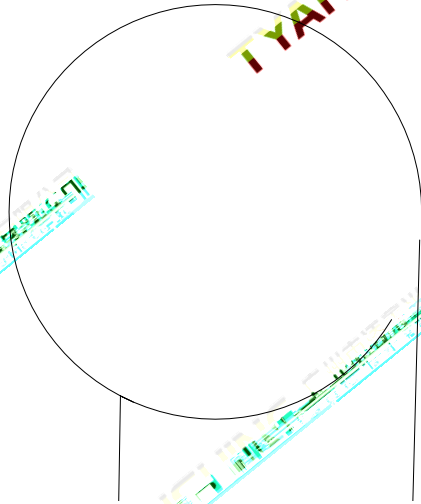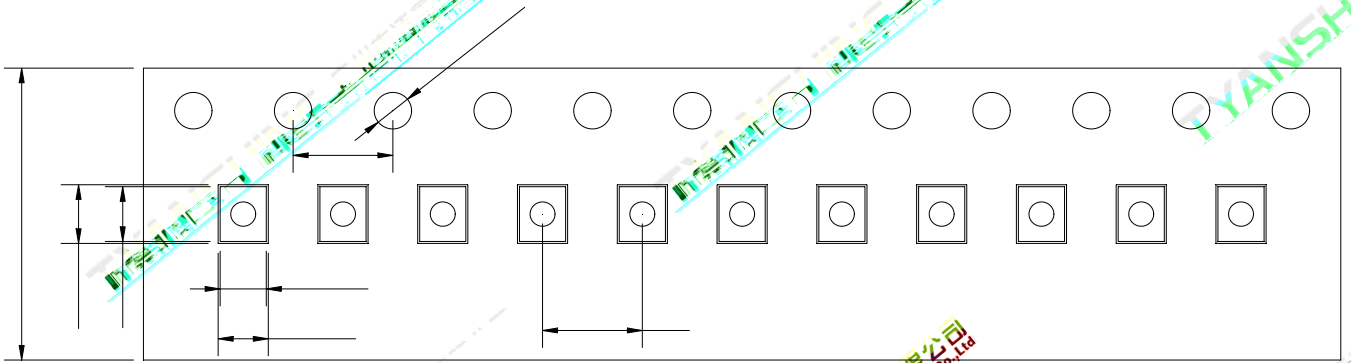

--	--	--	--	--	--