

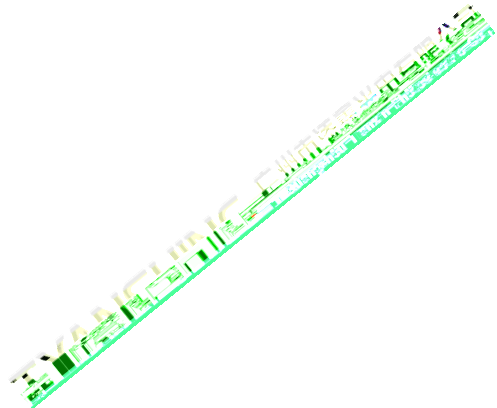
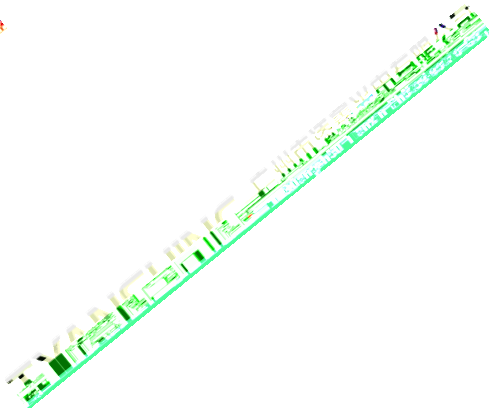

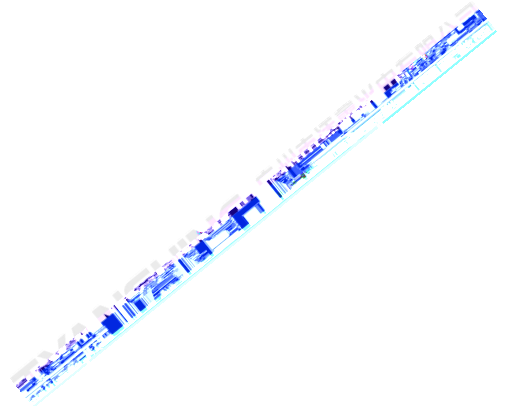
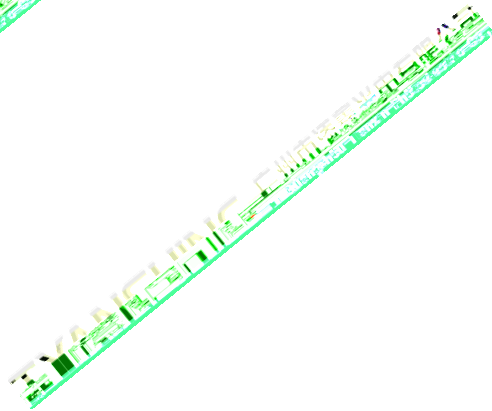
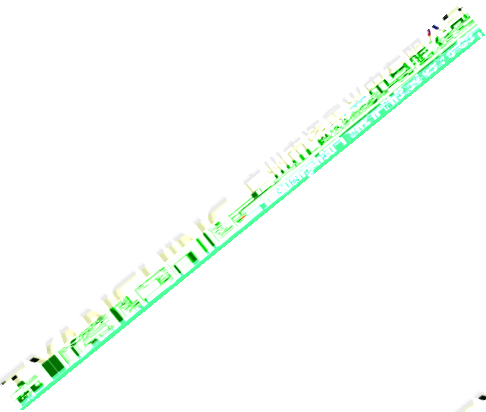
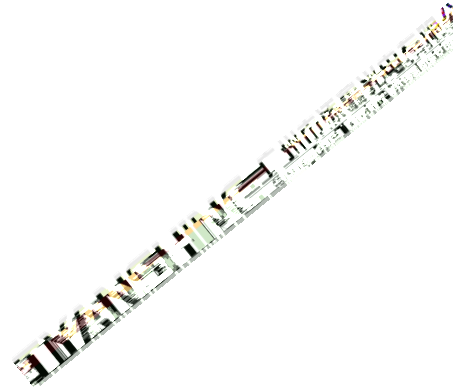
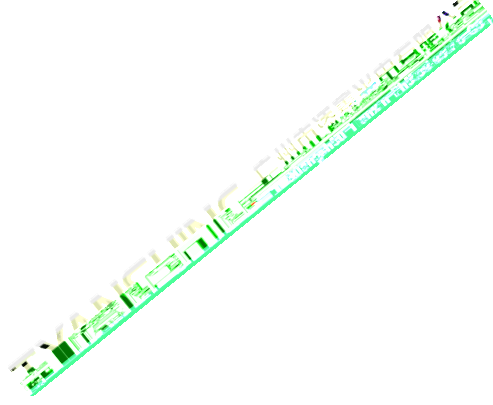


TYANSHINE

广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co.,Ltd

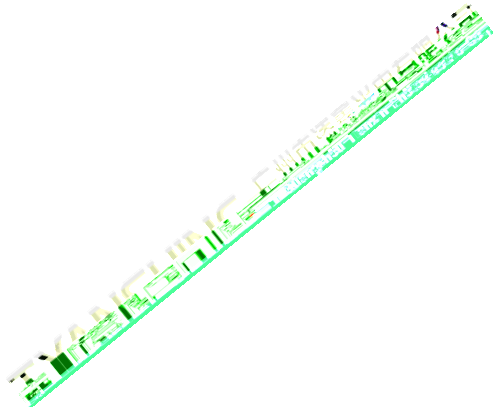

Package Dimensions:

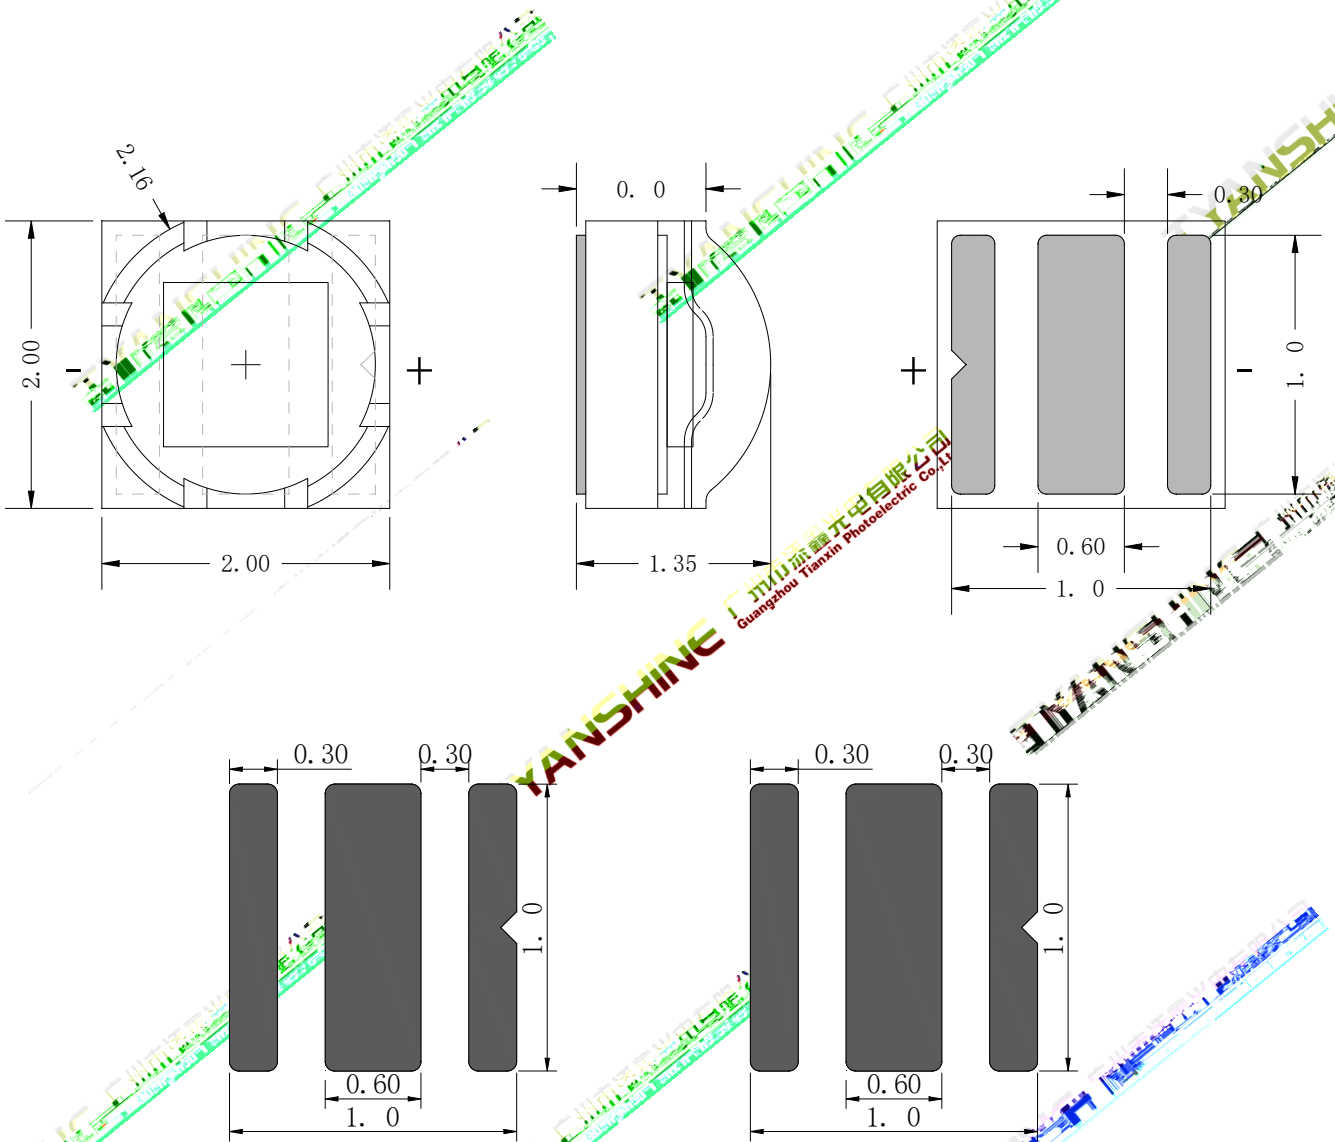

Notes:










--	--	--	--	--	--




Absolute Maximum Ratings (Tc=25)

Parameter	Symbol	Ratings	Unit

Notes:

--	--	--	--	--	--

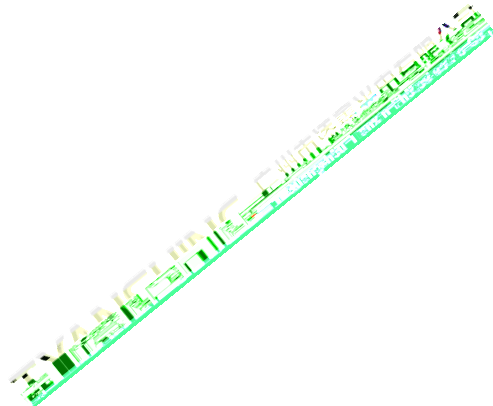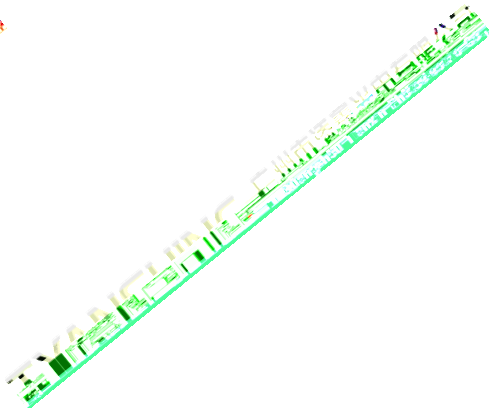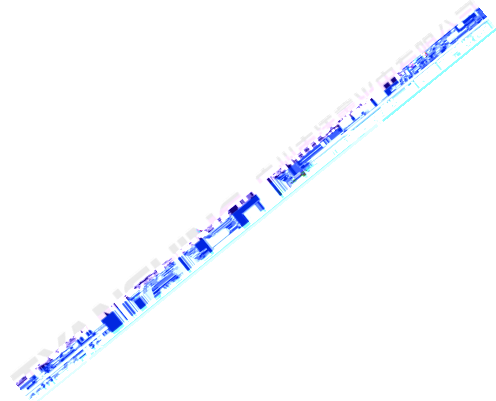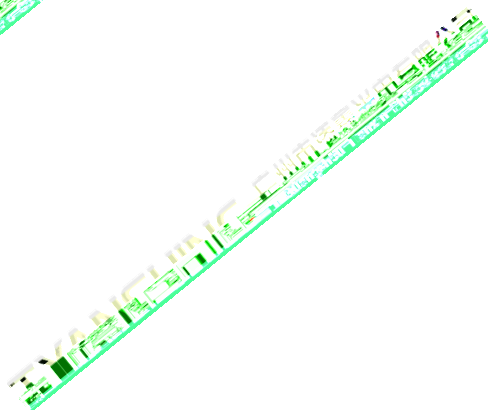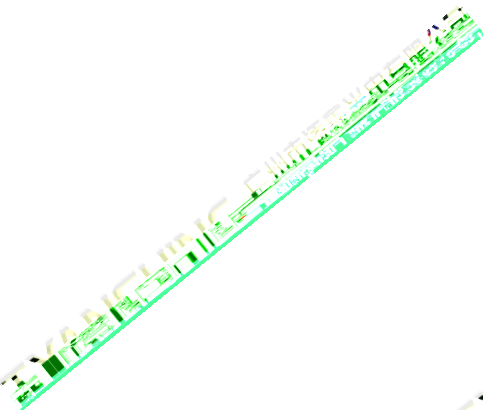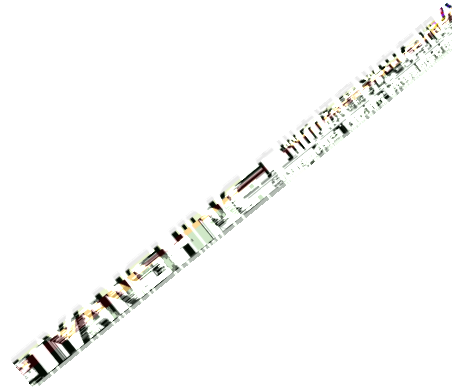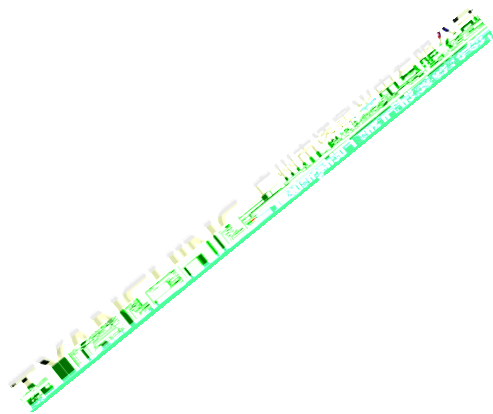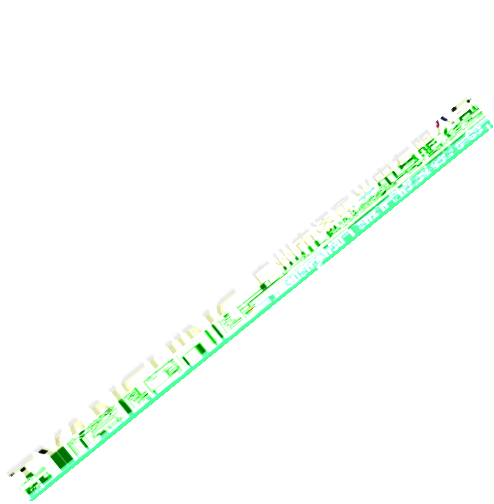

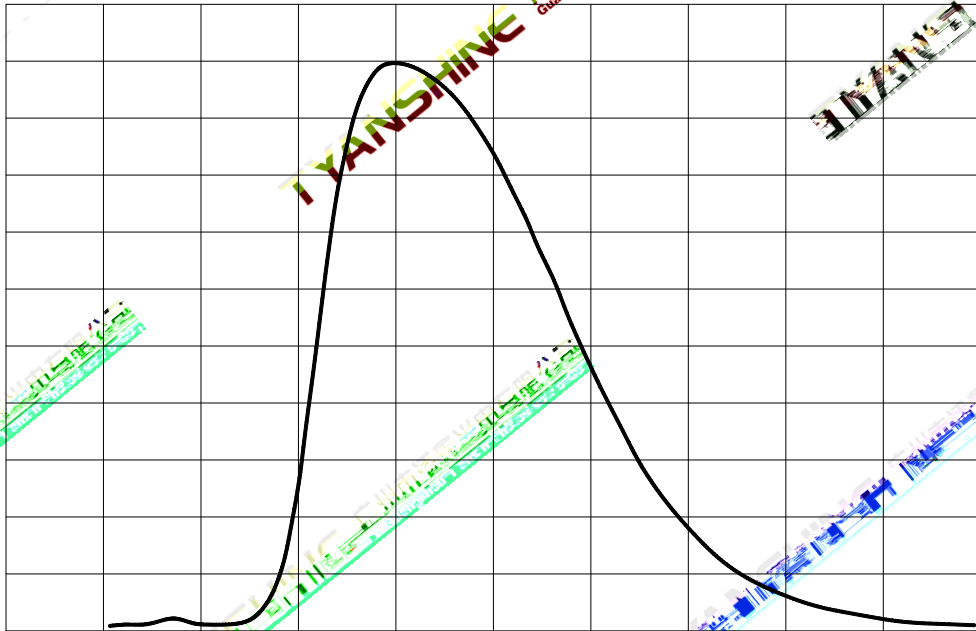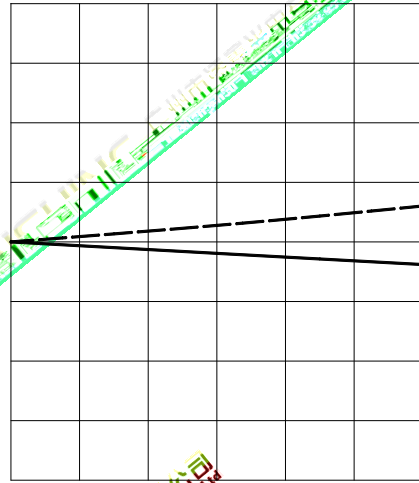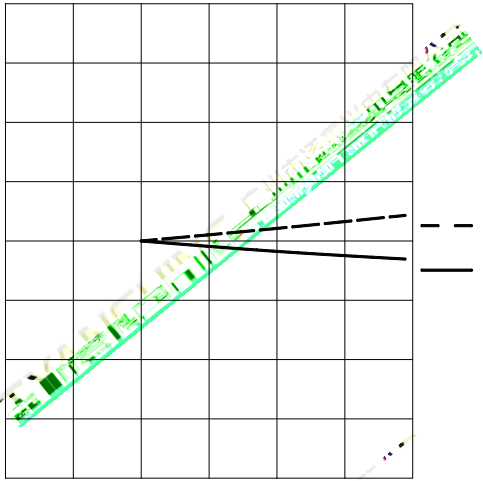

Notes: 


Notes:

--	--	--	--	--	--

Usage Precautions

Storage Environment Condition



Soldering Condition

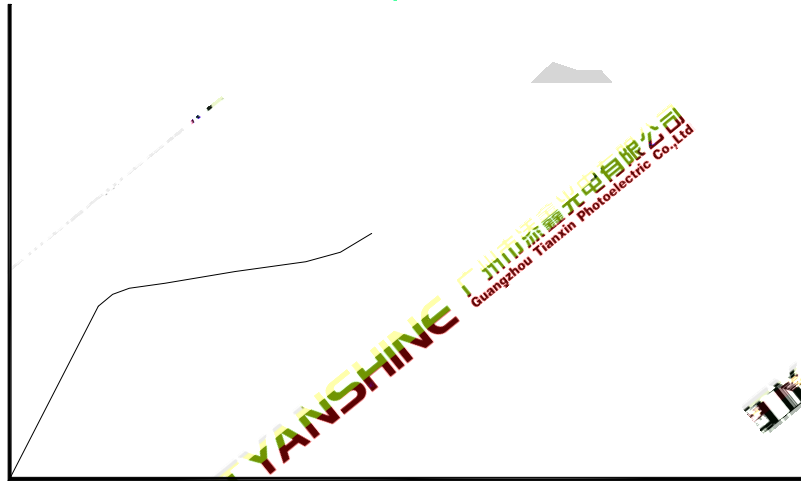

--	--	--	--	--	--

Dimensions For Cannulation And Packaging

Quantity:2000 PCS

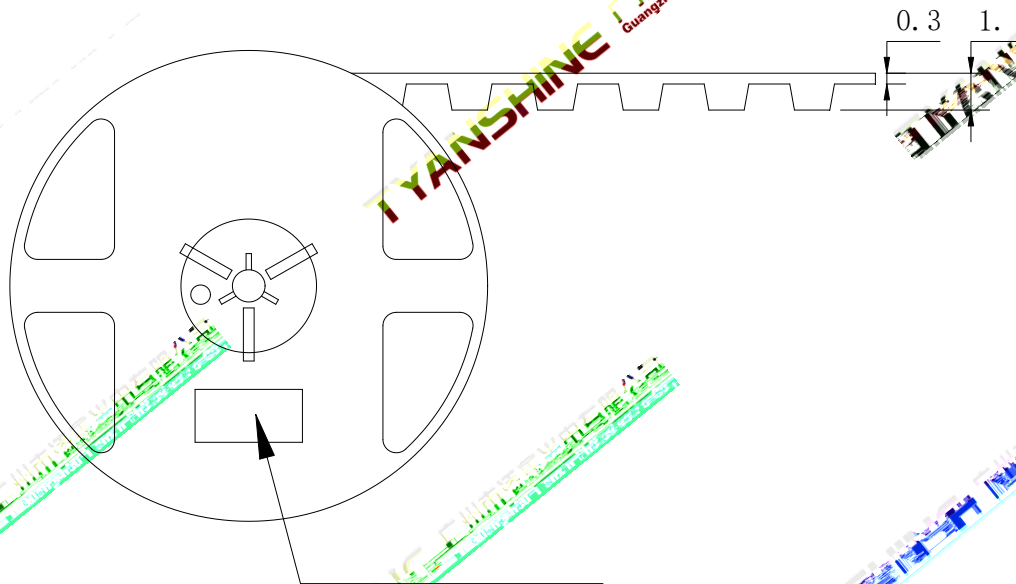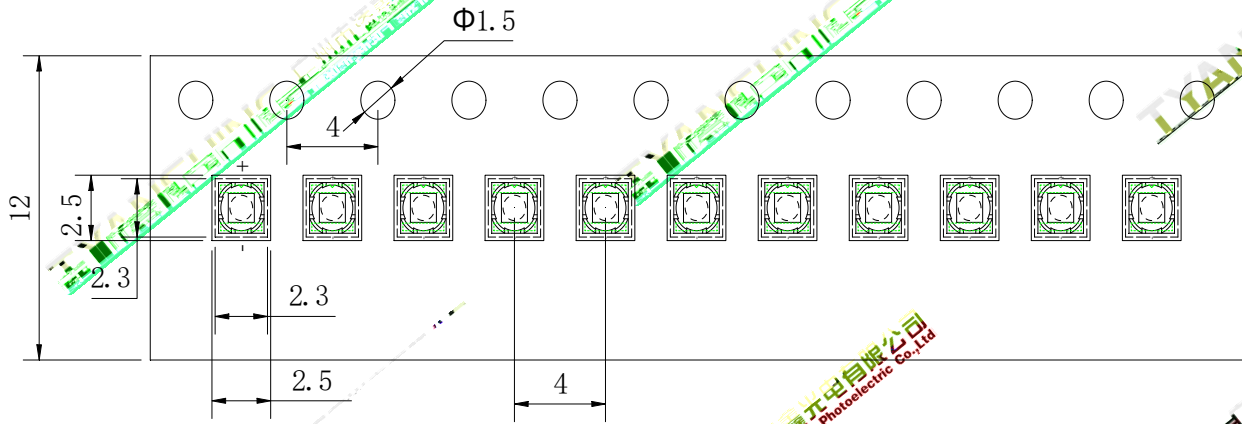

Notes:

--	--	--	--	--	--