

# TX-2020A3FSA1-NG4DA-01

## PRODUCT SPECIFICATION

### Features:

1000

### Chip Material:

### Emitting Color:

( )


### Applications:

-2020 3 1- 4 -01

- 0005







1 8

**Package Dimensions:**

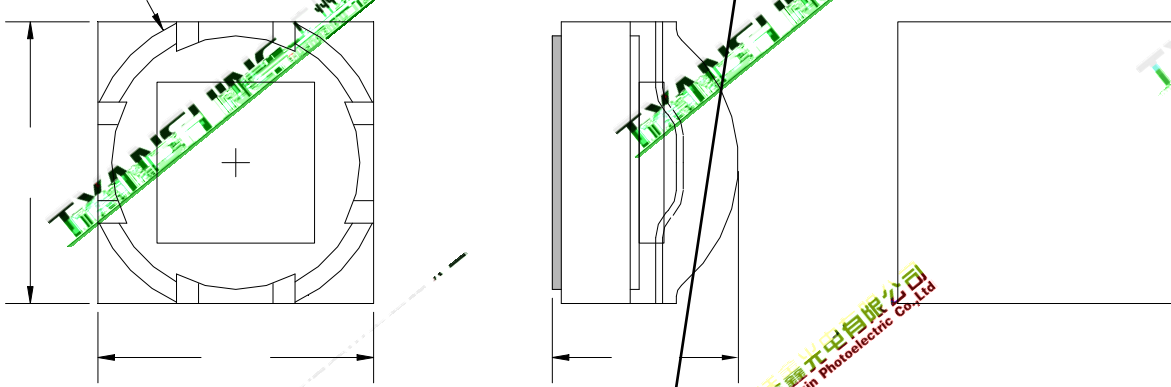

**TYANSHINE**  
广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co.,Ltd

**TYANSHINE**  
广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co.,Ltd

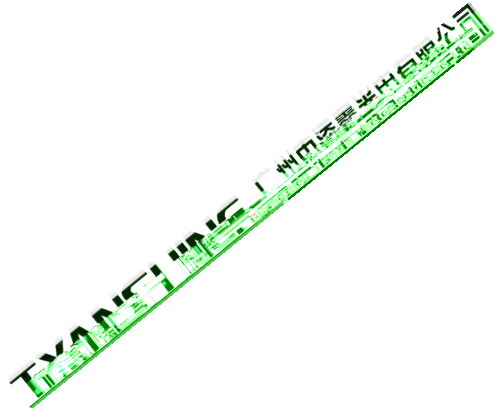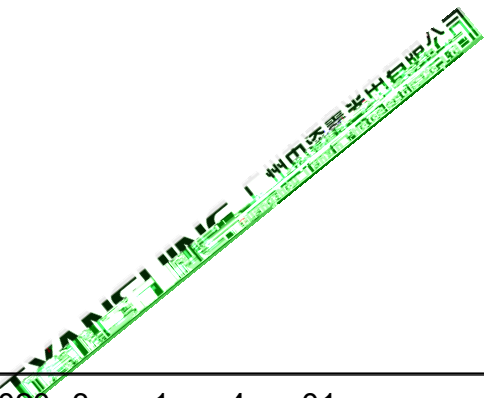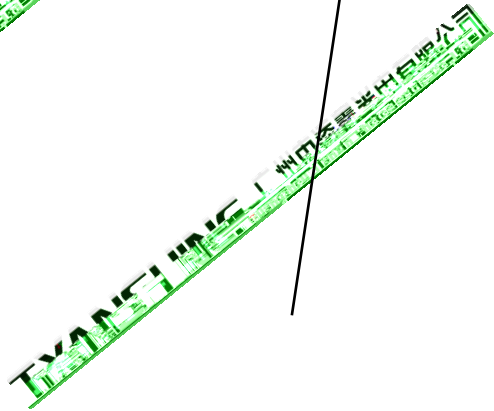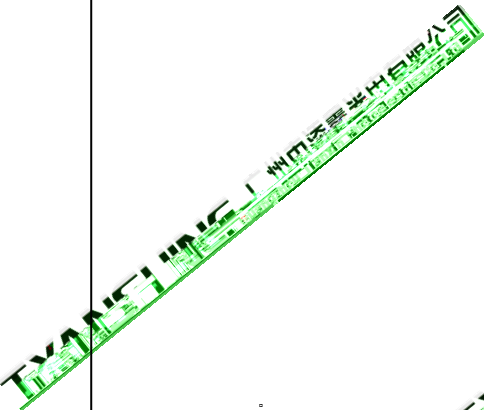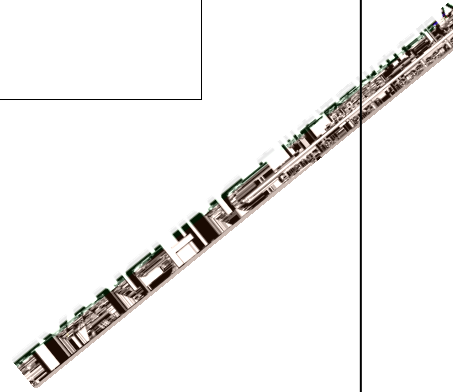

.	-2020	3	1-	4	-01	.	-	0005	2	8
---	-------	---	----	---	-----	---	---	------	---	---

**Absolute Maximum Ratings (Tc=25 )**

Parameter	Symbol	Ratings	Unit
		1000	
	$\Phi$		
1.	$D_n$	0.1 , 1/10.	
<b>Notes:</b>			
1.			
2.			
3.			
			00 0
			005
			3 8
			1.0



3.  
4.  
5.

Typical

(25

3.4  
( 3.2  
3.0  
2.8  
2.6  
2.4


0%













0.3

Characteristics Curves

)

1250

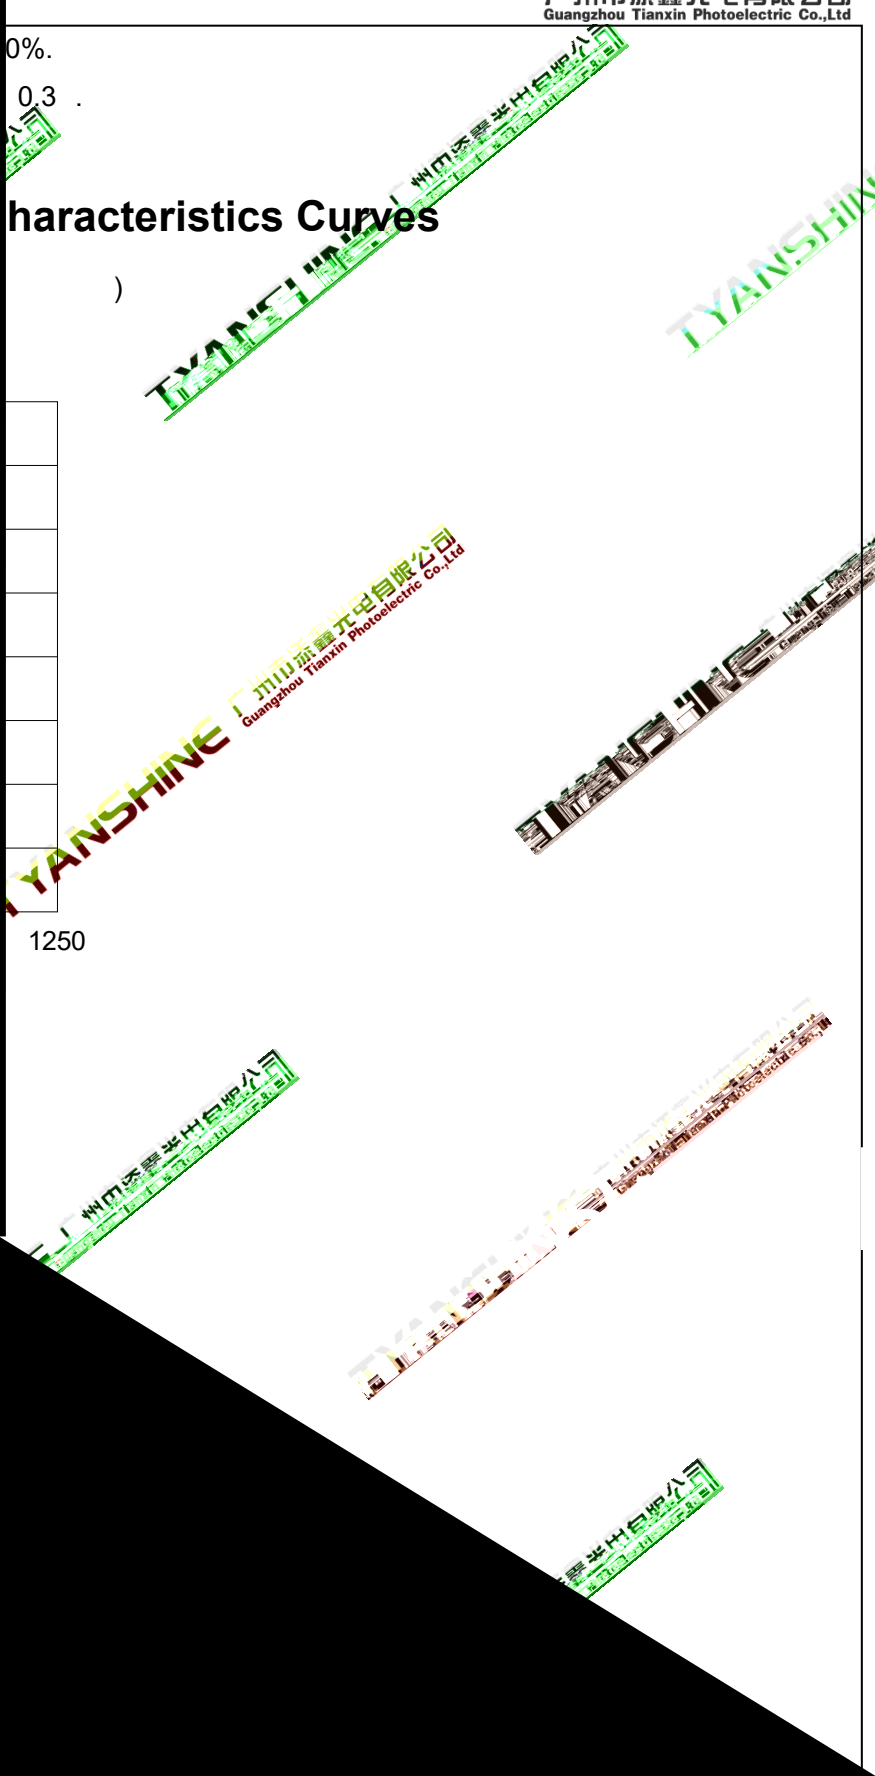

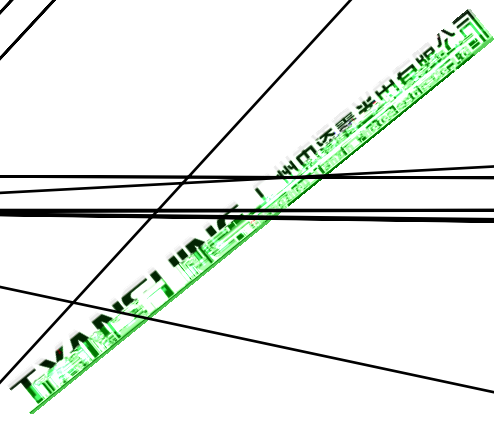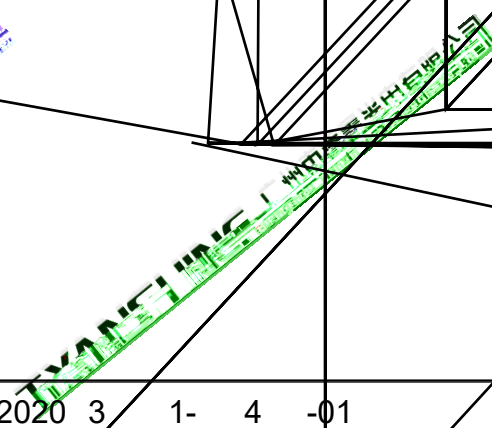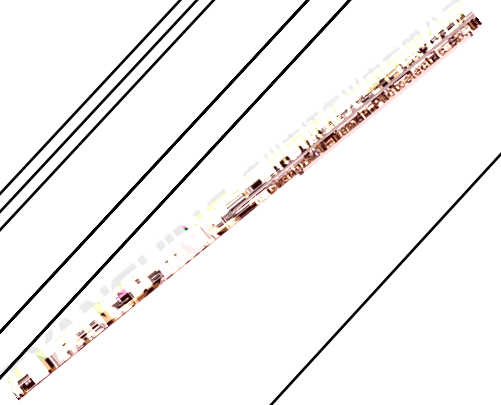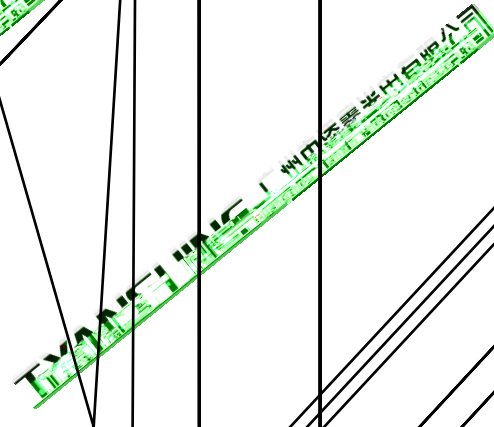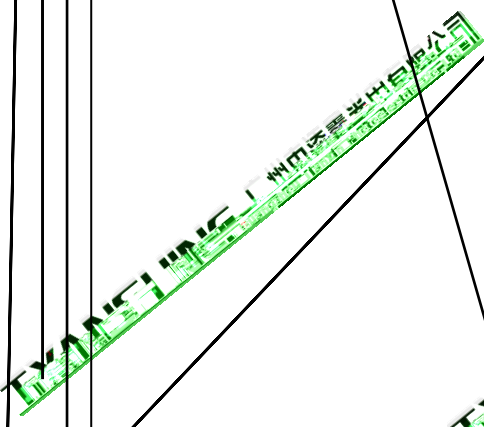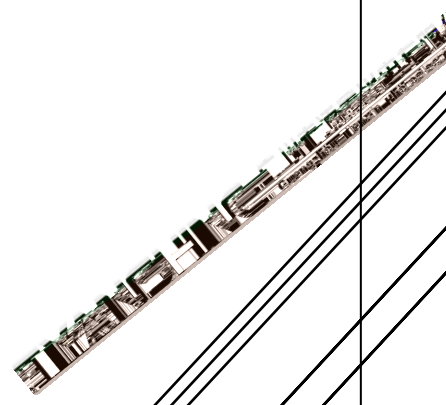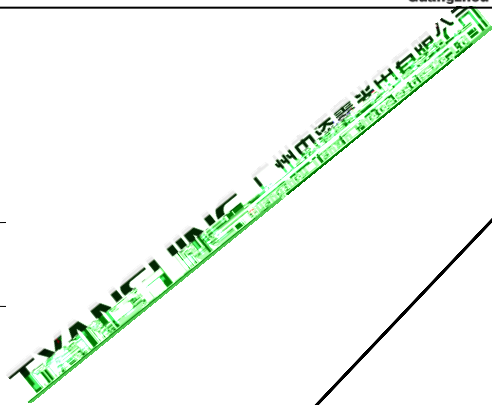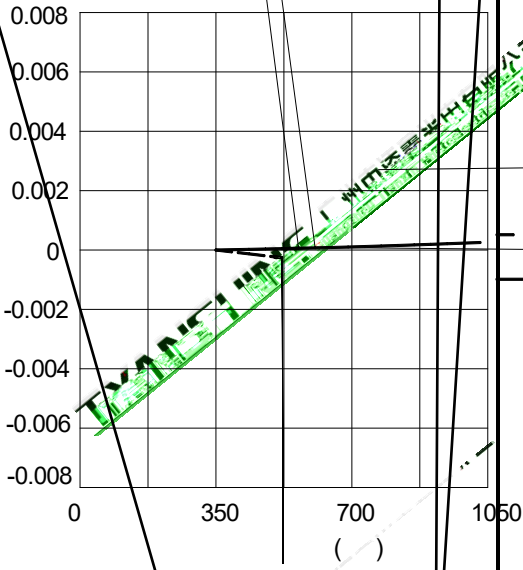

-2020 3 1- 4 -01 . - 0005 6 8

//

1.0


2. 5.

### Usage Precautions

#### Storage Environment Condition

5 30 (41 86 )  
60%


#### Soldering Condition

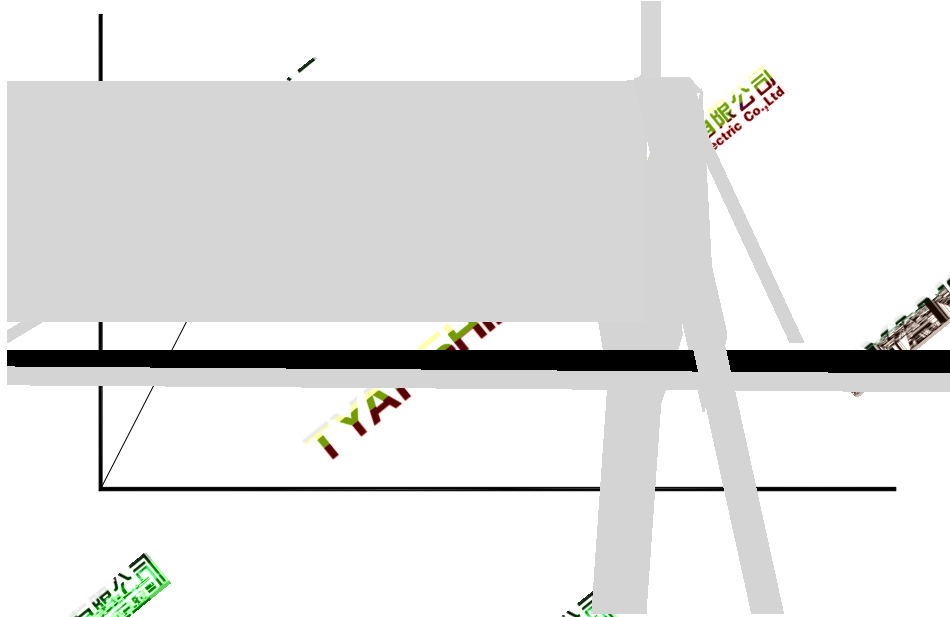


.	-2020	3	1-	4	-01	.	-	0005	7	8
---	-------	---	----	---	-----	---	---	------	---	---

# Dimensions For Cannulation And Packaging

Quantity:2000 PCS

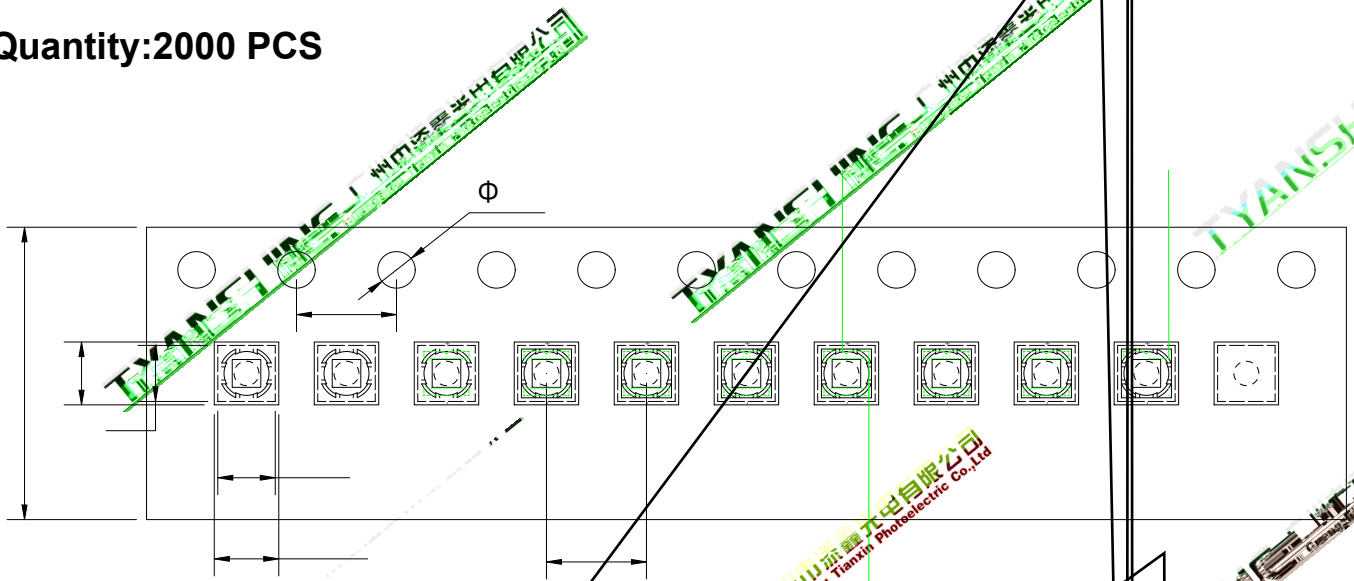

**TYANSHINE**  
广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co.,Ltd

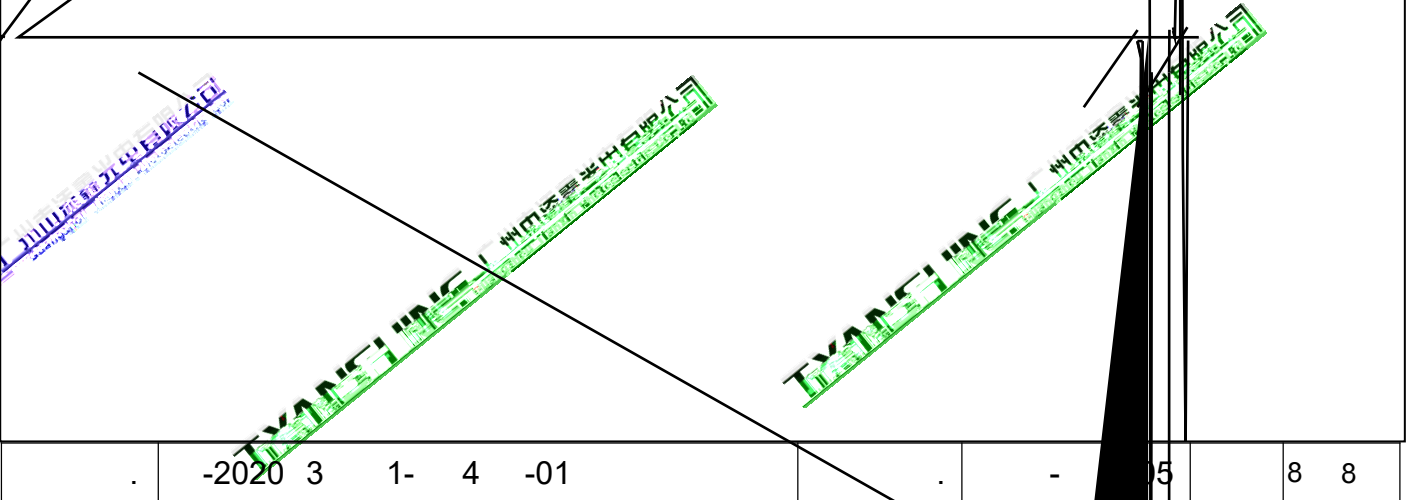

-2020 3 1- 4 -01

5 8 8

//

1.0