
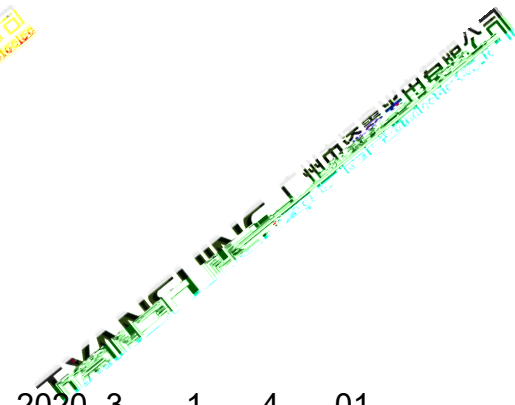

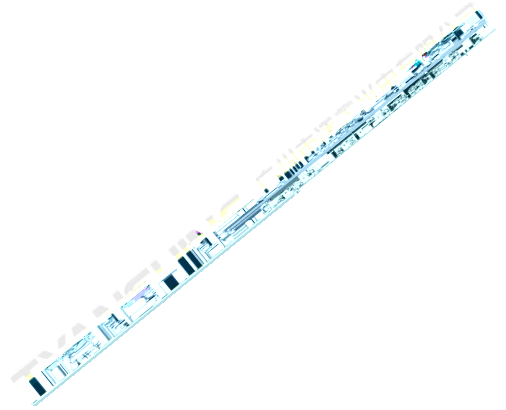
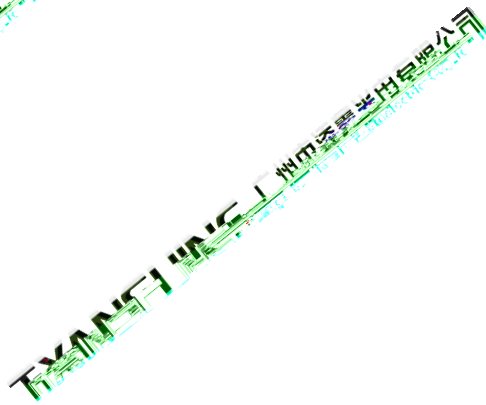
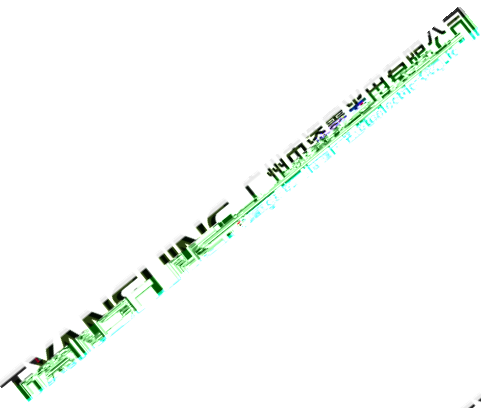


TYANSHINE 广州  
Guangzhou

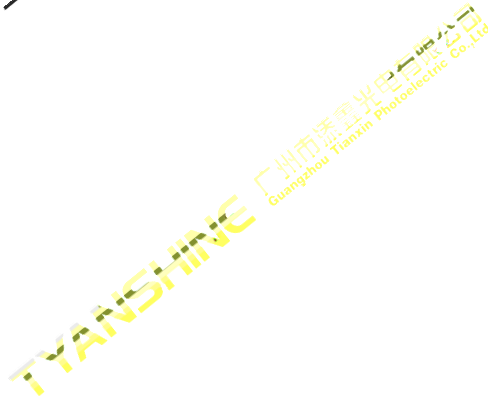


-2020 3 1- 4 -01

- 000

//

### Package Dimensions:

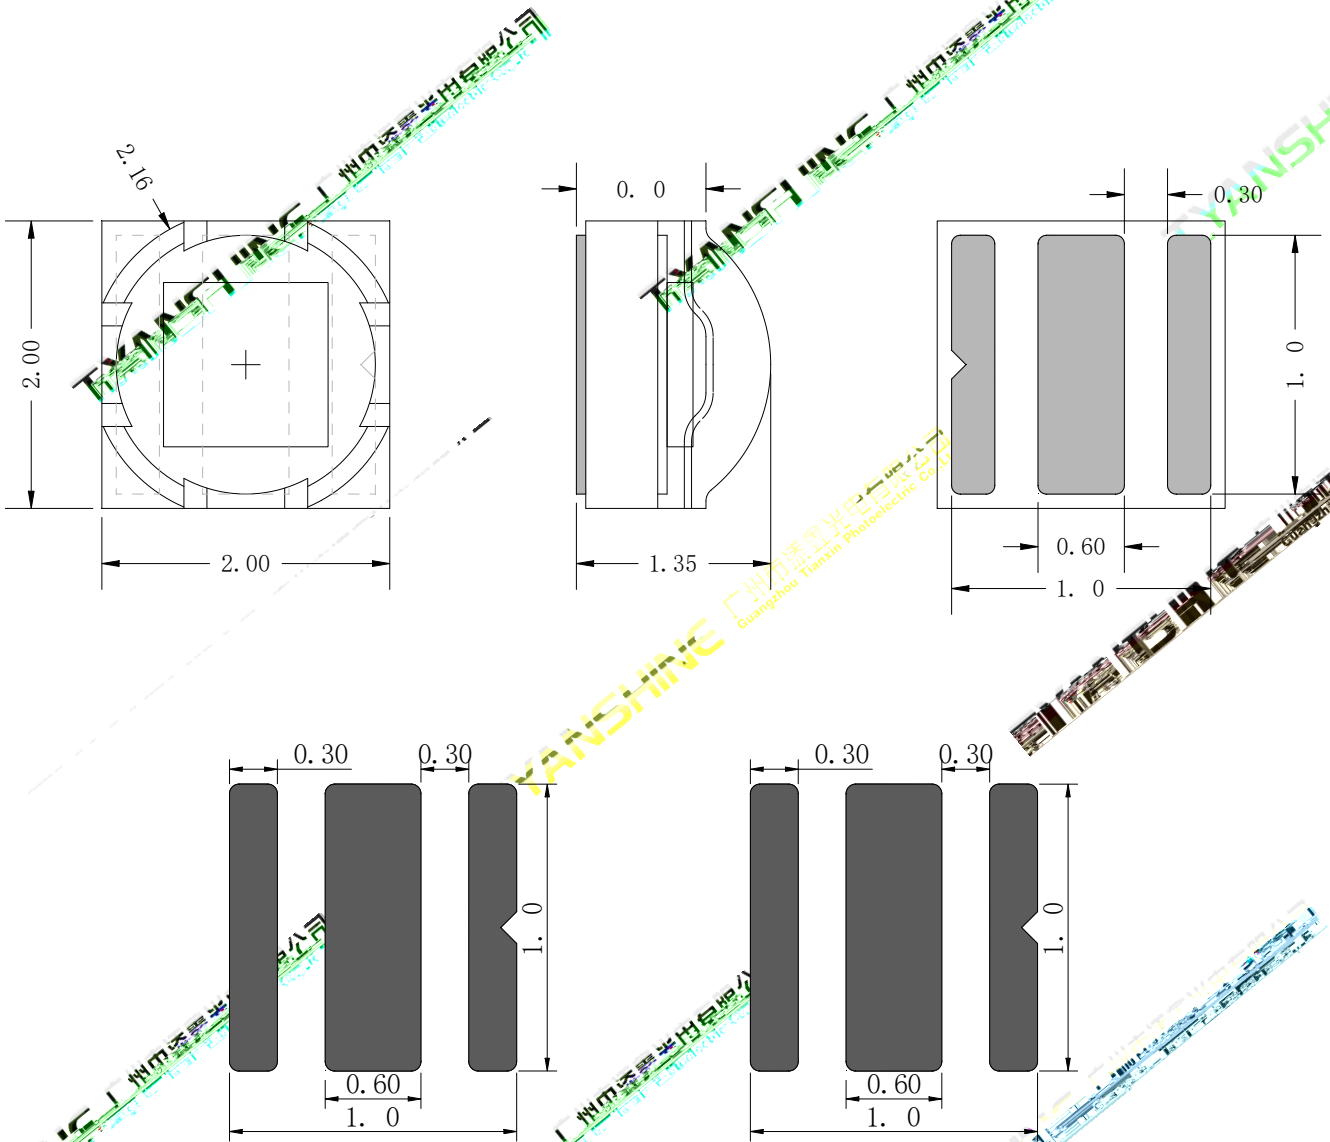

### Notes:

- 1.
- 2.

0.1

-2020 3 1- 4 -01

- 0006

2 8

//

1.0

### Absolute Maximum Ratings (Tc=25 )

Parameter	Symbol	Ratings	Unit
		1000	
1		1200	
		5	
		3.1	
		150	
( )			
		-40 +70	
		-30 +85	

1. 0.1 , 1/10.


**Notes:**

- 1.
- 2.
- 3.

### Electrical Optical Characteristics (Tc=25°C IF=0.35A)

Parameter	Symbol	Min.	Typ.	Max.	Units
		145	160	175	
		2.7	2.	3.1	
		4030	4150	4280	
-		5	105	115	
50	2 1/2		135		
		5		1	
	-		7.0		
	/		-2.8		/

### White light Color coordinate filing (IF=0.35A)










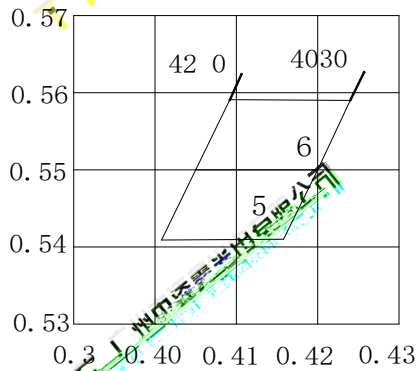





			1	1	2	2	3	3	4	4
5	4030	4280	0.4008	0.540	0.4050	0.5500	0.4200	0.5500	0.4158	0.5410
6			0.4240	0.55 0	0.4050	0.5500	0.4200	0.5500	0.40 2	0.55 1

**Notes:**

- 1.
2. 1/2
3. 10%.
4. 0.3 .
5. 2.

-2020 3	1-	4	-01	.	-	0006	4	8
---------	----	---	-----	---	---	------	---	---

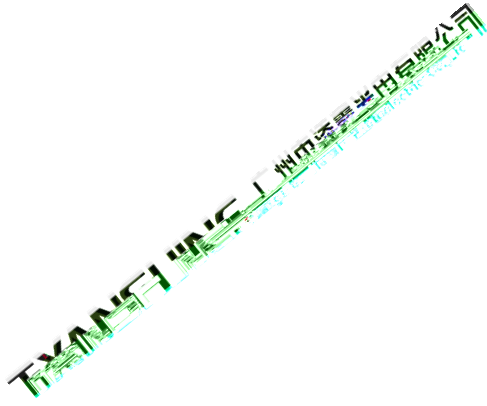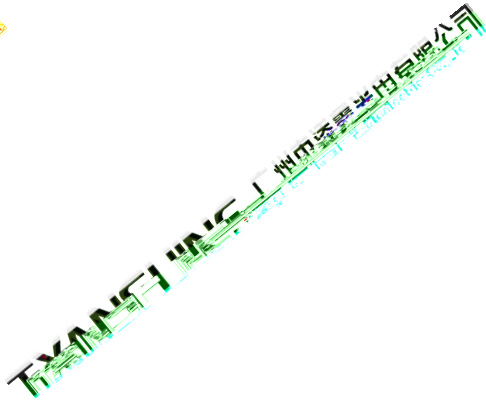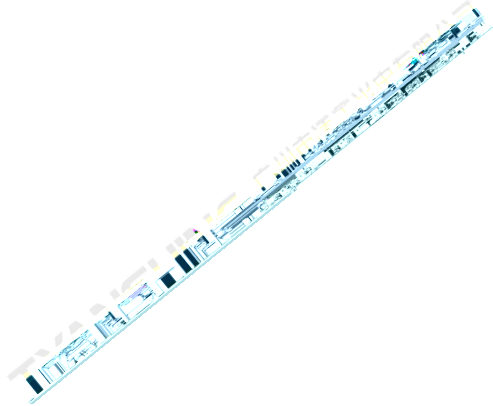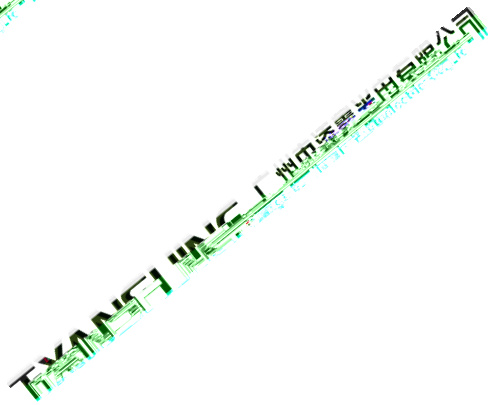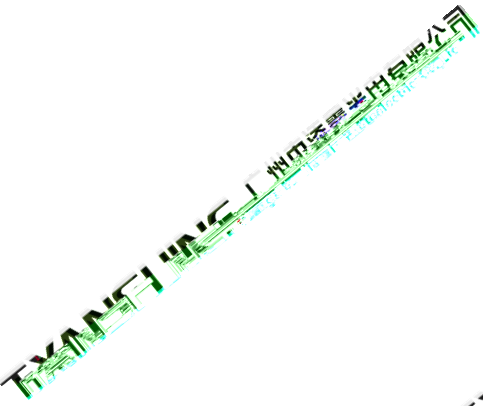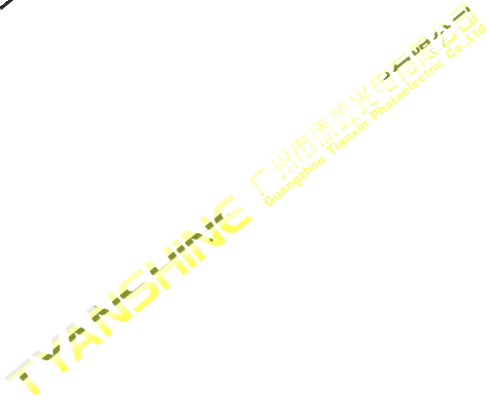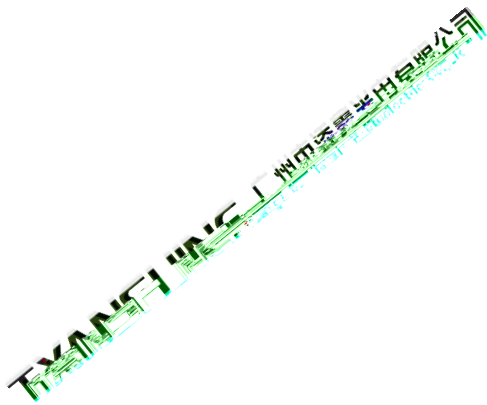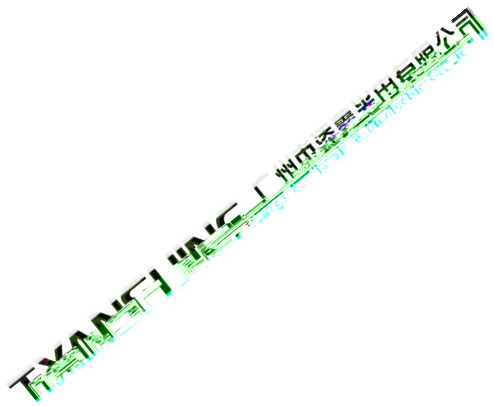

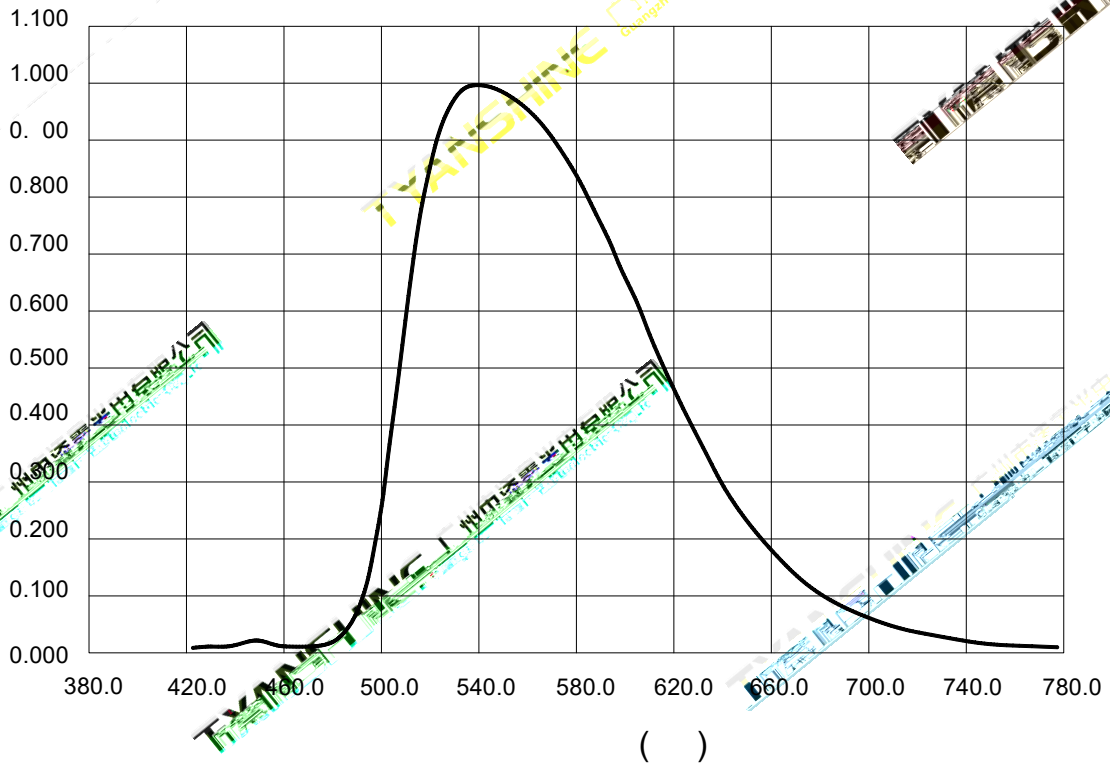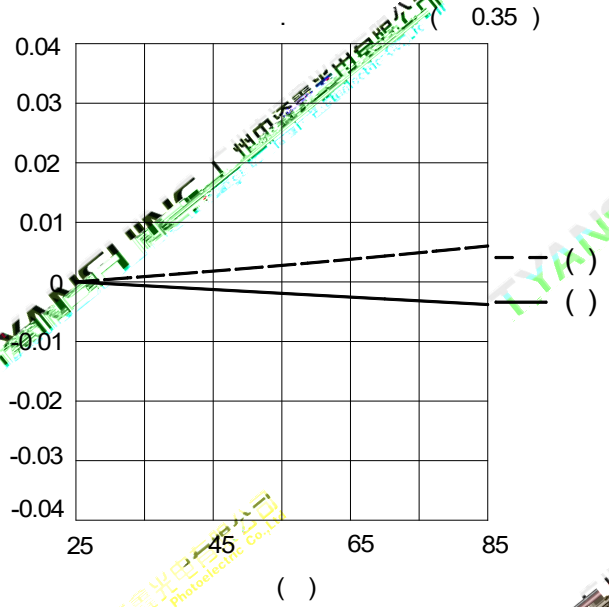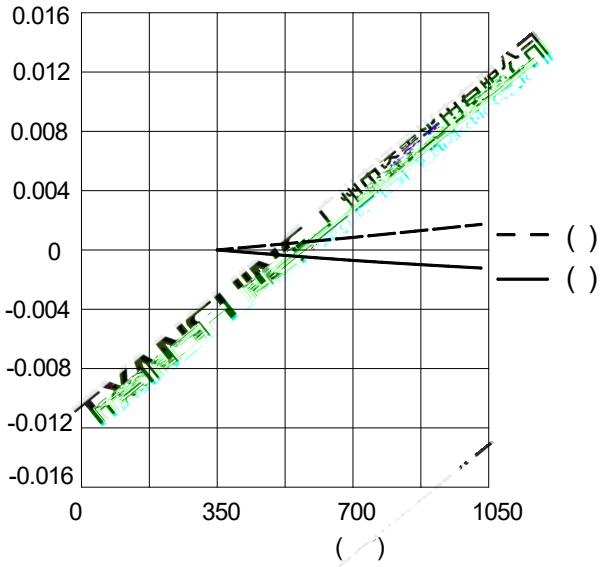

Notes: —

Notes:

- 1. 2 1/2
- 2.

1/2

-2020 3 1- 4 -01

- 0006


6 8

# Usage Precautions

## Storage Environment Condition

5 30 (41 86  
60%


## Soldering Condition

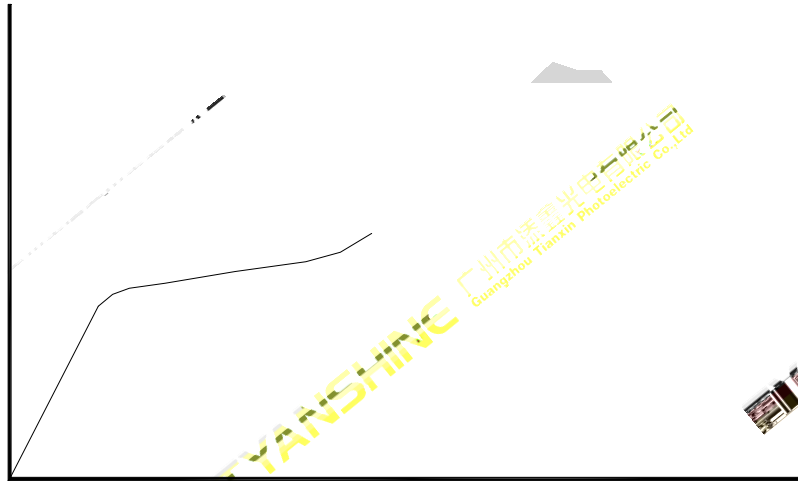

.	-2020	3	1-	4	-01	.	-	0006	7	8
---	-------	---	----	---	-----	---	---	------	---	---

# Dimensions For Cannulation And Packaging

Quantity:3000 PCS

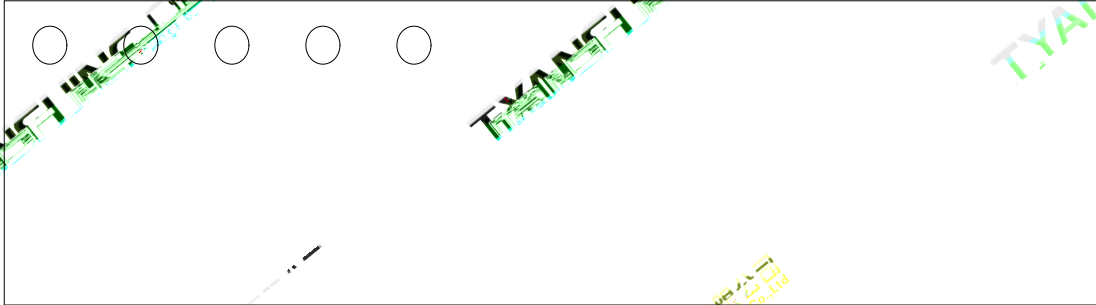

.	-2020	3	1-	4	-01	.	-	0006	8	8
---	-------	---	----	---	-----	---	---	------	---	---

//

1.0